



The unique solution for S-trap toilets.



7 m  
↗  
110 m

## SANIGRIND® Pro

|                         |                      |
|-------------------------|----------------------|
| Inlets diameter         | 40 mm                |
| Discharge pipework      | 22/ 28/ 32 mm        |
| IP rating               | IP 44                |
| Electrical power supply | 220-240 V / 50-60 Hz |
| Motor power             | 1100 W               |
| Weight                  | 12 kg                |
| Non-return valve        | included             |
| Active carbon filter    | included             |

VERTICAL AND HORIZONTAL  
DISCHARGE: ↑ 7 m → 110 m





EASY SERVICE  
ACCESS PANEL →



Cover gives direct  
access to electronic  
components →



Robust blade suitable for heavy usage.  
Designed to handle accidental flushing  
of sanitary items.

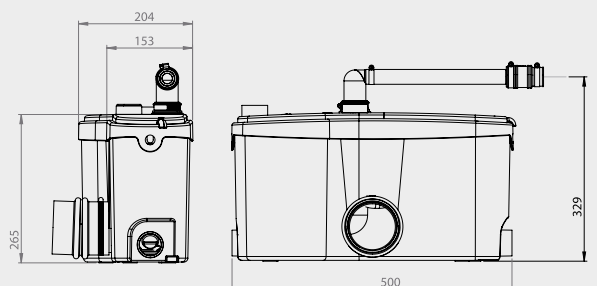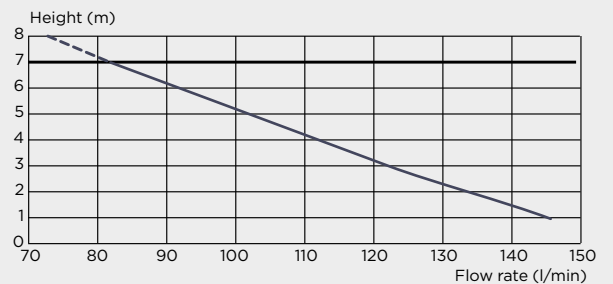

### BENEFITS

- Ideal for public usage
- Vertical discharge : 7m
- The possibility to lower the pump