

Sanicubic® 1 VX

grey water, black water

Sanicubic 1 VX is a lifting station with 1 pump equipped with a vortex wheel. It is designed for lifting waste water from pavilions or small commercial premises. Sanicubic 1 VX has direct and secure access to the pump and level sensors. The station is delivered with a remote control box and an audible and visual alarm.



PERFORMANCES

- Total manometric head: 13 m
- Max. flow rate: 40 m³/h

PRODUCT BENEFITS

- Installation without clearance
- Accessibility in case of maintenance
- 3 inlets
- Vortex wheel
- Direct and safe access to the pump
- Wired alarm included
- Remote control panel included



STANDARD (SEE ACCESSORIES PAGES)


Classic control box



Wired alarm box




CONNECTIONS

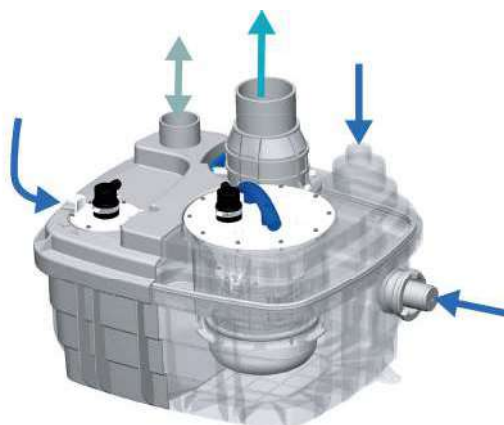


- ➔ External inlet diameter: 40, 50, 100, 110, 125 mm
- ➔ Discharge diameter ext.: 90/110 mm
- ↔ Ext.ventilation diameter: 75 mm

FLOOR-MOUNTED RANGE

DIMENSIONS

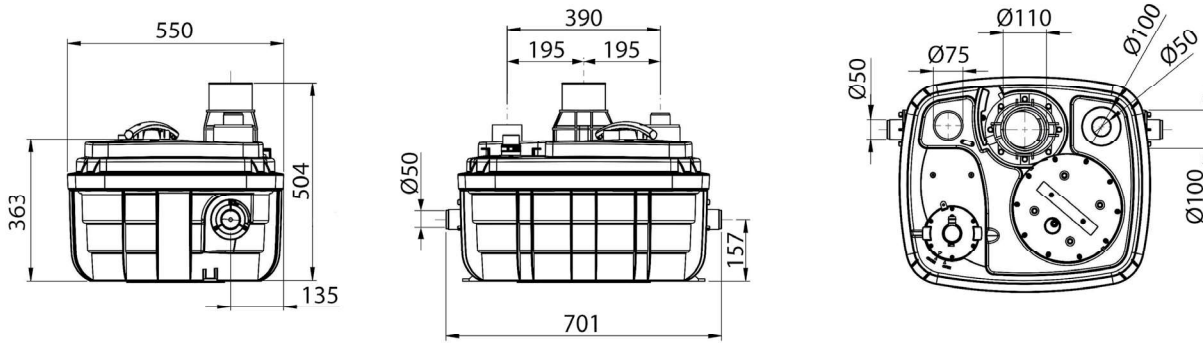

CURVE

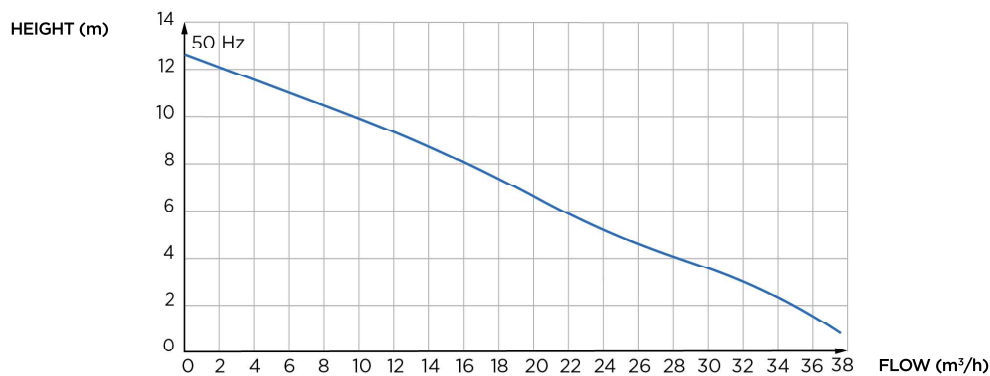

	Sanicubic® 1 VX S
Type of control box	Classic
Materials	
Tank	PP GF
Pump housing	PA 12 GF
Motor housing	PA 12 GF
Impeller	PPO GF
Electrical features	
Voltage (V)	230
Frequency (Hz)	50-60
Power consumption P1 (P=power) (W)	2000
Power output P2 (P=power) (W)	1400
Mode of operation	S3 15%
IP Rating	IP68
Hydraulics	
Total manometric head (m)	13
Max. flow rate (m ³ /h)	40
External inlet diameter (mm)	40, 50, 100, 110, 125
Discharge diameter ext. (mm)	90/110
Ext.ventilation diameter (mm)	75
Total volume (L)	60
Useable volume (L)	21
ON Level /OFF level (mm)	165/95
Alarm level (mm)	235
Passage libre (mm)	50
Max. temperature of the pumped liquid (5 min)	70°C
Type of wheel	Vortex
Type of activation	Pneumatic
Logistics	
Gross weight (kg)	30
EAN code	3308815077611
Factory code	CUBIC1XLVX