

Sanipuddle

Sanipuddle is a puddle sucking pump with handling capacity up to 1 mm of water, designed to lift clear water from cellars, laundries, swimming pool floors, spas or lift shafts etc. Sanipuddle can lift the water up to 7 m. Non-return valve and grooved fitting included. An electronic control level is available as an option.



PERFORMANCES


- Total manometric head: 7 m
- Max. flow rate: 5.5 m³/h

PRODUCT BENEFITS


- High quality polypropylene and stainless steel pump
- Dry up to 1 mm of water
- Double mechanical seal
- Integrated non-return valve



CURVE

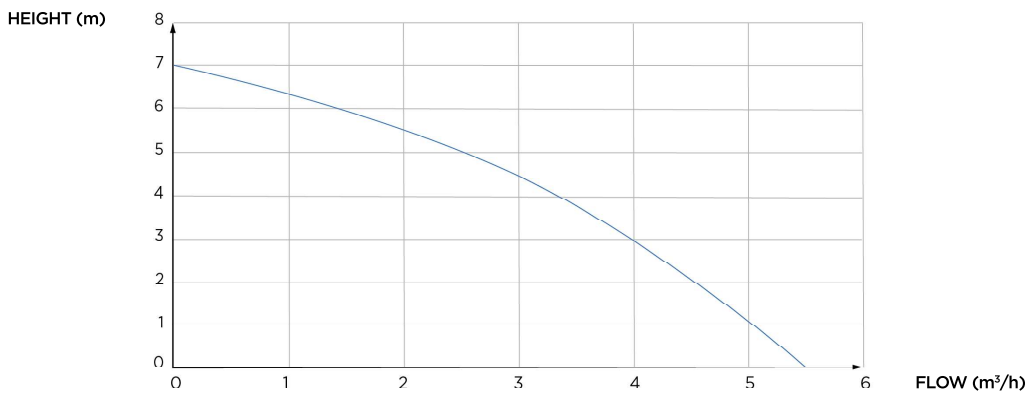

DIMENSIONS

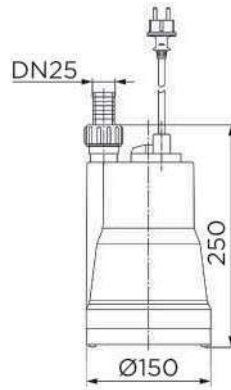

| Sanipuddle | |
|---|----------------------|
| Materials | |
| Pump housing | PP GF |
| Shaft | Stainless steel |
| Waterproofing | Carbon/Keramisch/NBR |
| Motor housing | Stainless steel |
| Impeller | PA 6 GF |
| Electrical features | |
| Voltage (V) | 230 |
| Frequency (Hz) | 50-60 |
| Power consumption P1 (P=power) (W) | 300 |
| Power output P2 (P=power) (W) | 160 |
| RPM (=revolution per minute) (tours/min) | 2800 |
| Immersion depth (m) | 5 |
| Power cable Length (m) | 10 |
| Hydraulics | |
| Total manometric head (m) | 7 |
| Max. flow rate (m ³ /h) | 5.5 |
| Discharge diameter G (pouces) | 1 |
| Particle size (mm) | 1 |
| Max. temperature of the pumped liquid (5 min) | 70°C |
| Type of wheel | Multi-channel |
| Type of activation | Manual |
| Identification and logistics | |
| Gross weight (kg) | 3.77 |
| EAN code | 3308815081427 |
| Factory code | SANIPUDDLE-001 |

Electronic level control for Sanipuddle



The electronic level controller is used for controlling the level of fluids in tanks or pits when very precise control is required or when the level of fluids must be very low. It consists of 4 stainless steel electrodes, an electrode holder, a mounting bracket, a 10 m cable and a plug-in control adapter.

| EAN CODE | FACTORY CODE |
|---------------|--------------|
| 3308815083025 | HYDRO-00048 |